

**TRIPLE TOSS WITH POST**

**USER GROUP:** 2-12 years

**RECOMMENDED CREW:** 1 person

**TOOLS REQUIRED:**

Shovel / Post Hole Digger / Auger  
Level

**INSTALLATION TIME:** Approximately 1 hour

**WEIGHT:** 69 lbs.

**CONCRETE REQUIRED:** 3.53 cubic feet


**NOTE:** Concrete must have a minimum rating of 2,500 psi and must be mixed per manufacturer's recommendations.

**PRE-INSTALLATION CHECK:**

Compare all items received to the packing list. Notify your local representative immediately if any parts are missing or damaged.

**We are not responsible for items discovered missing after 72 hours from time of delivery!**

**TRIPLE TOSS WITH POST**

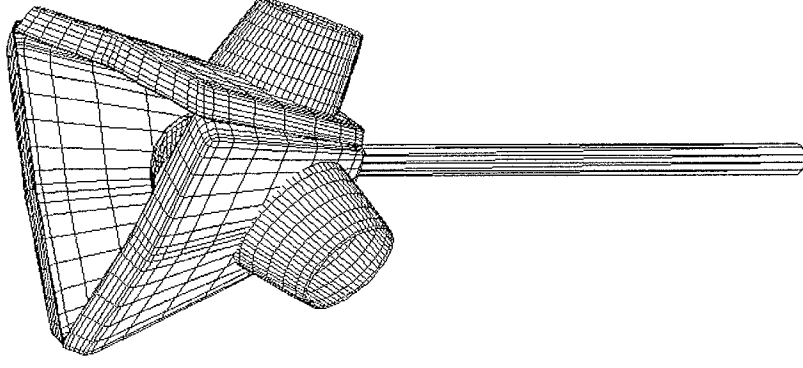

## INSTALLATION GUIDELINES

### STEP 1

Refer to PLAN VIEW to locate position of triple toss.

### STEP 2


Excavate footing hole as shown as shown in FOOTING LAYOUT and FOOTING ELEVATION. Place a 2" spacer in bottom of hole.

### STEP 3

Select fun ball post, plastic top, three 3/8"x1-1/2" self-tapping screws and three 3/8" flat washers. Place plastic top over post, making sure that post is fully inserted into top. Insert screw through washer and drive each screw through recessed area in plastic (spaced evenly around top) into post to secure. Gently tighten until all three screws are installed. Then tighten all.

### STEP 4

Set fun ball in place in footing hole. Block and brace to correct level and height. **NOTE:** Fun ball does not have to be installed on an impact-attenuating surfacing. Pour concrete in footing to correct level. **NOTE:** Concrete must have a minimum rating of 2,500 psi and must be mixed per manufacturer's recommendations. **Allow concrete to dry for at least 48 hours before use!**

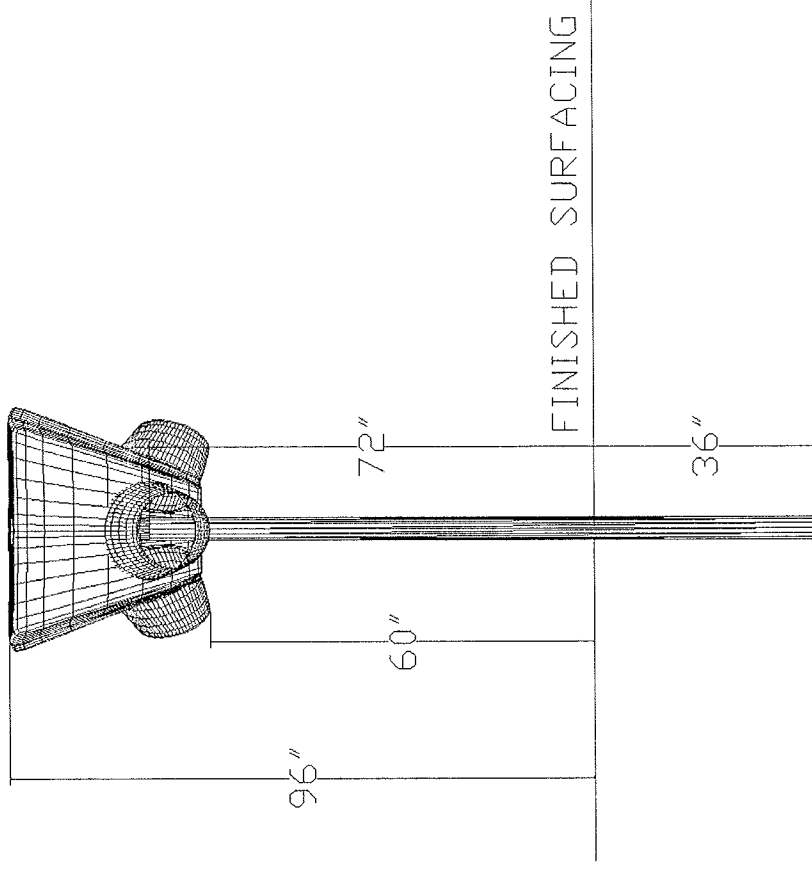


### ELEVATION VIEW

Please note that elevations given are a recommendation. You may adjust the height of the fun ball approximately 12" higher or lower than elevation given to best suit the needs of the user group.

**INSTALLATION GUIDELINES**

**BILL OF MATERIALS  
PART / HARDWARE LIST**

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	N/A	Post 108" Length - 3.5" Diameter
2	3	0743510	3/8"x1-1/2" Self Tapping Screw
3	3	0743515	3/8" Flat Washer
4	1	TRT-03	Rotomolded Triple Toss

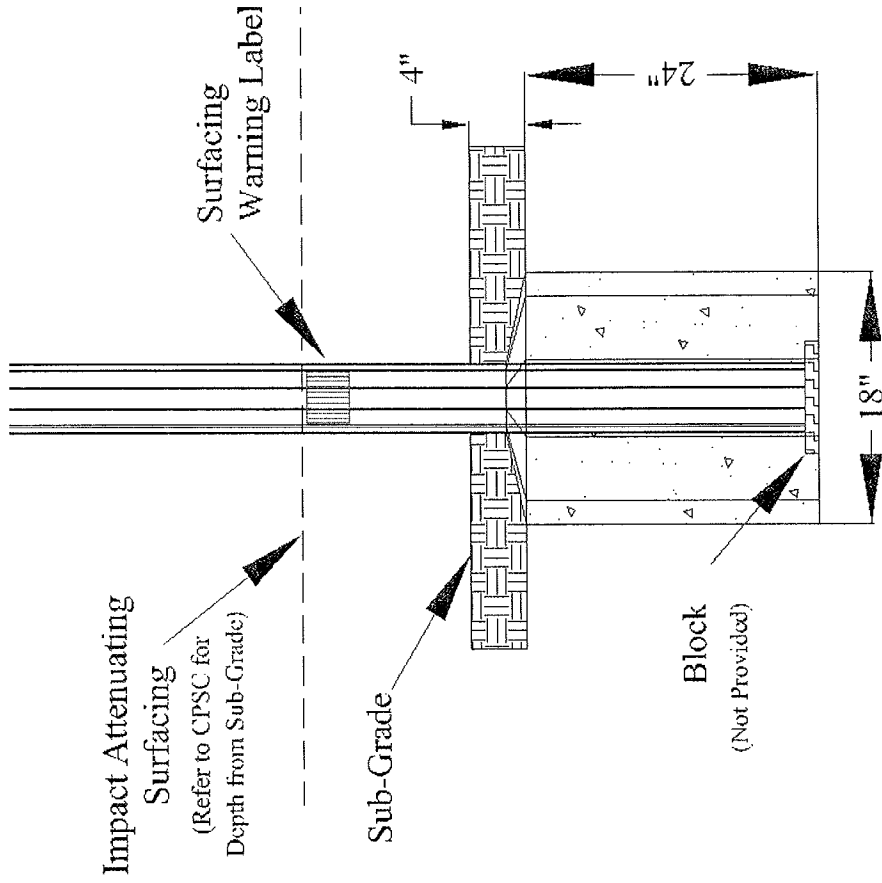

**FOOTING ELEVATION**