




ASHURN


STANDARD

WEBCOAT PRODUCTS
P.O. BOX 3160
McALESTER, OKLAHOMA 74501
1-800-505-5101
FAX: (918)426-5924
E-MAIL: WEBCOAT@WEBCOAT.COM


Please take the time to locate and identify each part. Assemble the units on a smooth flat surface. It is also helpful to lay the tops and seats on cardboard or a drop cloth to prevent scratching of the surface during assembly. All parts have been pre-cut and pre-drilled for ease of assembly. All holes are slotted to allow for easy assembly and for final levelling of tops and seats to frames. Fully assemble all parts without totally tightening nuts and bolts. After all assembled go back and retighten nuts to bolts. DO NOT OVER TIGHTEN NUTS TO BOLTS. Over tightened nuts can crack the plastisol coating. All the necessary quantities of parts required are listed in this assembly instructions.

DO NOT BEGIN ASSEMBLY UNTIL YOU HAVE READ THESE INSTRUCTIONS AND ARE FAMILIAR WITH THE PARTS.

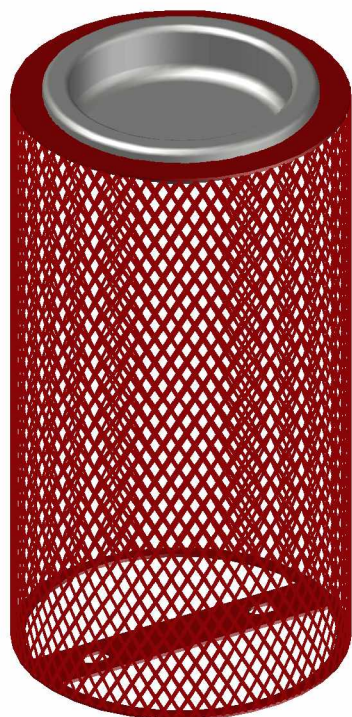

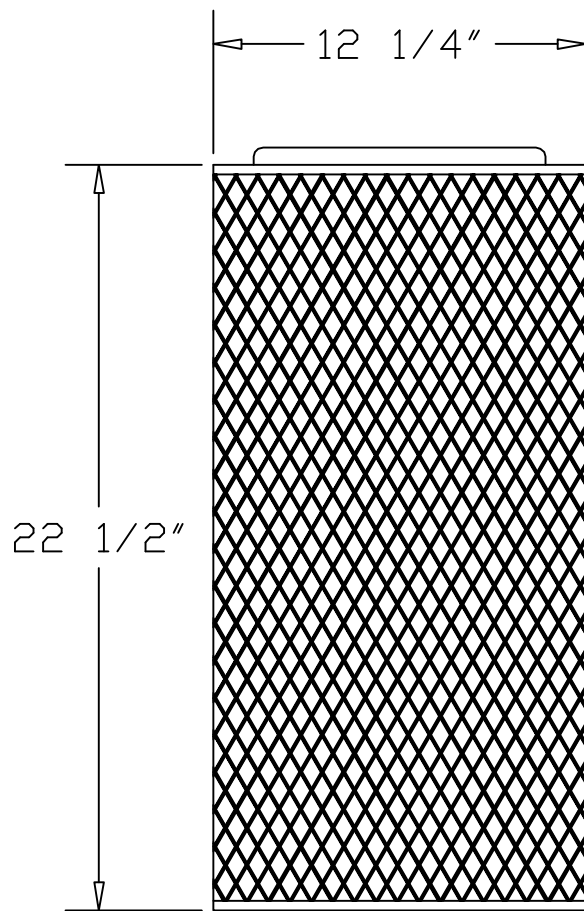

STEEL LINER

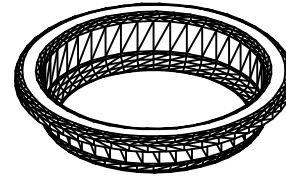

FOR A SURFACE MOUNT, INSERT
2 5/16" X 4" LAG BOLTS
INTO THE CONCRETE

SPECIFICATIONS

22 1/2" X 12 1/4" POLY VINYL EXPANDED METAL ASHURN WITH A CHROME PLATED STEEL PAN.
COATED WITH A 1/8" TO 1/4" THICK PLASTISOL ULTRAVIOLET STABILIZED VINYL COATING FUSED
AND BAKED TO A 90% GLOSS.

TOTAL OVERALL DIMENSIONS ARE 22 1/2" X 12 1/4".

ASHURN IS MADE OF ROLLED HEAVY DUTY 3/4" #9 EXPANDED METAL WITH 1/4" FLAT STEEL
FOR THE TOP AND BOTTOM.

STANDARD FRAME IS PORTABLE DESIGN.

ON TOP IS A CHROME PLATED STEEL PAN SECURED WITH A CHAIN FOR EASE OF EMPTYING.

STANDARD FRAME IS A PORTABLE DESIGN THAT CAN BE SURFACE MOUNTED BY INSERTING
A 2 5/8" X 4" LAG BOLT INTO THE GROUND. **MOUNTING HARDWARE NOT INCLUDED.**

ALL HARDWARE IS NON-CORROSIVE.
WEIGHT FOR THE ASHURN IS 35 LBS.

MAINTENANCE

To maintain luster it is recommended to wash, rinse, and dry the units after prolonged use.
Check for loose bolts and nuts and tighten as needed. Contact the factory for genuine
Webcoat part replacements if needed.